



Firma: ISCom d.o.o.
Adresa: T.C. "Danubius" Karađorđeva 12,
lokali 28, 156 i 156a
Telefon: 026/4-100-500, 069/4-100-500
Fax:
PIB: 104927929
E-mail: prodaja@iscom.rs

Item

Power Station Sandberg 72000mAh 421-22 PD100W lamp

Šifra: 61569

Kategorija proizvoda: Punjači za mobilne telefone

Proizvođač: SANDBERG

Cena: 30.872,00 rsd.




no.: 421-22

EAN: 5705730421228

Sandberg DC Power Station 72000 is your mobile power hub, with a capacity of 72,000 mAh / 270 Wh. You get two powerful 100W USB-C PD ports, two USB-A QC3.0 ports with up to 22W, and a 12V DC output, so you can charge your laptop, tablet, phone, and much more. All five outputs can be used simultaneously! It comes with both male and female adapters for the car's 12V socket, so you can easily connect car equipment, a cooler, or a pump directly. Supports charging via both USB-C and solar panel (MPPT) through the DC input. With a built-in LED lamp, you're ready for anything from camping to power outages.

5 ports for simultaneous charging
Charges laptops, phones, coolers, more
Solar charging with MPPT supported
Ideal for camping and emergencies

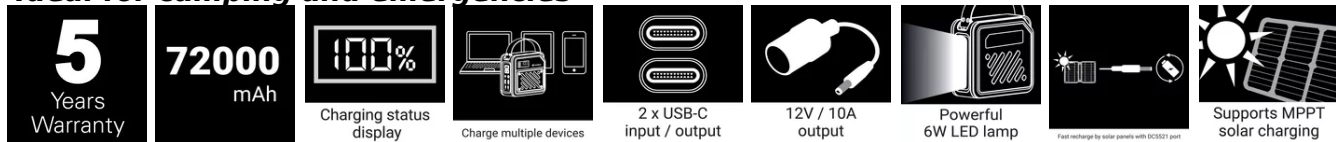

Battery capacity: 24 Ah @ 11.25V = 270 Wh /
72000 mAh @ 3.75V = 270 Wh

Lifecycle: 2000+ cycles to 80%

USB-C PD input 2: 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/5A (100W max)

USB-C PD output 1: 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/5A (100W max)

USB-A output 1: 5V/3A, 9V/2A, 12V/1.5A (18W
max)

DC output: 9.6V-12.6V / 10A (DC5521)

LED light: Integrated 6W LED

Charge time: Approx. 3 hours with 100W PD
charger (not included)

Supports pass-through charging with port-
specific behavior:

If USB-C1 is being used for input, DC IN cannot
be used simultaneously. Other ports work
normally.

Battery type: LiMnFePO4 (LMFP)

USB-C PD input 1: 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/5A (100W max)

DC input: 12V-26V / 100W (MPPT supported)
(DC35135)

USB-C PD output 2: 5V/3A, 9V/3A, 12V/3A,
15V/3A, 20V/5A (100W max)

USB-A output 2: 5V/3A, 9V/2A, 12V/1.5A (18W
max)

Max total output power: 268W

Weight: Approx. 2.3 kg

If power is being input via DC IN, then USB-C1
cannot be used for input or output at the same
time. Other ports work normally.

If USB-C2 is used for input, USB-A2 can still
provide output at the same time, up to 15W.
Other ports work normally.

Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena
cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se
isključivo vrši virmanski - bezgotovinski.